

Technical Data Sheet 0603 Package Infrared LED

IR19-315C/TR8

Features

- Peak wavelength λ p=940nm
- Package in 8mm tape on 7" diameter reel
- Compatible with infrared and vapor phase reflow solder process.
- Pb free
- The product itself will remain within RoHS compliant version.

Descriptions

- IR19-315C/TR8 is an infrared emitting diode in miniature SMD package which is molded in a water clear epoxy.
- The device is spectrally matched with silicon photodiode and phototransistor.

Applications

- PCB mounted infrared sensor
- Infrared remote control units with high power requirement
- Scanner
- Infrared applied system


Device Selection Guide

LED Part No.	Chip	Lens Color	
	Material	Lens Color	
IR	AlGaAs	Water clear	

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 1 Page: 1 of 9

Device No: DTS-193-220 Prepared date: 04-27-2006 Prepared by: Daniel Yang

Package Dimensions

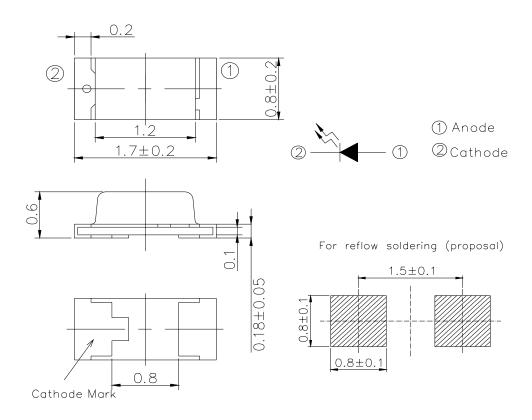

Notes: 1.All dimensions are in millimeters 2.Tolerances unless dimensions ± 0.1 mm

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Units	
Continuous Forward Current	I_{F}	65	mA	
Reverse Voltage	V_R	5	V	
Operating Temperature	T_{opr}	-25 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	T_{stg}	-40 ~ +100	$^{\circ}\!\mathbb{C}$	
Soldering Temperature	T_{sol}	260	$^{\circ}\!\mathbb{C}$	
Power Dissipation at(or below)	P_d	130	mW	
25°C Free Air Temperature				

Notes: *1:Soldering time ≤ 5 seconds.

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 1 Page: 2 of 9

Device No: DTS-193-220 Prepared date: 04-27-2006 Prepared by: Daniel Yang



Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Radiant Intensity	Ie	I _F =20mA	0.2	0.6		mW /sr
		$I_F = 100 mA$ Pulse Width $\leq 100 \mu$ s ,Duty $\leq 1\%$		4.0		
Peak Wavelength	λр	I _F =20mA		940		nm
Spectral Bandwidth	Δλ	I _F =20mA		45		nm
Forward Voltage	V_{F}	I _F =20mA		1.2	1.5	V
		$I_F = 100 mA$ Pulse Width $\leq 100 \mu$ s ,Duty $\leq 1\%$		1.4	1.8	
		$I_F=1A$		2.6	4.0	
Reverse Current	I_R	V _R =5V			10	μΑ
View Angle	2 \theta 1/2	I _F =20mA		140		deg

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 3 of 9

Device No: DTS-193-220 Prepared date: 04-27-2006 Prepared by: Daniel Yang



Typical Electro-Optical Characteristics Curves

Fig.1 Forward Current vs.

Ambient Temperature

Fig.2 Spectral Distribution


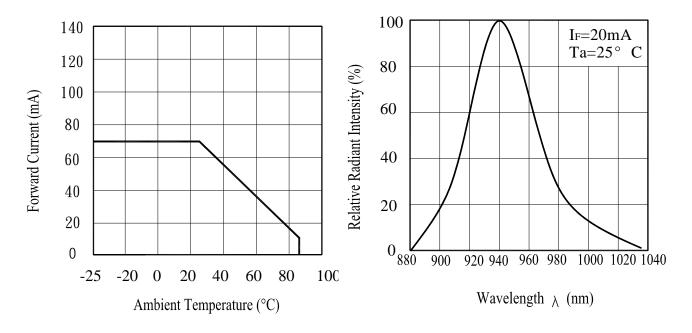


Fig.3 Peak Emission Wavelength
Ambient Temperature

Fig.4 Forward Voltage vs.
Ambient Temperature(°C)



Everlight Electronics Co., Ltd. Device No: DTS-193-220 http:\\www.everlight.com Prepared date: 04-27-2006 Rev 1

Page: 4 of 9

Prepared by : Daniel Yang




Typical Electro-Optical Characteristics Curves

Fig.5 Relative Intensity vs.

Ambient Temperature(°C)

Fig.6 Relative Radiant Intensity vs.

Angular Displacement








Fig.7 Forward Current vs Forward Voltage

Fig.8 Relative Intensity vs Forward Current





Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 1 Page: 5 of 9

Device No: DTS-193-220 Prepared date: 04-27-2006 Prepared by: Daniel Yang




Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: $60\pm5^{\circ}$ C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

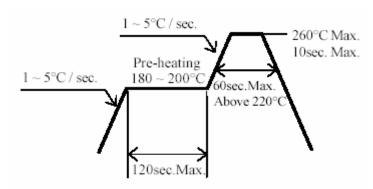

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 1 Page: 6 of 9

Device No: DTS-193-220 Prepared date: 04-27-2006 Prepared by: Daniel Yang




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

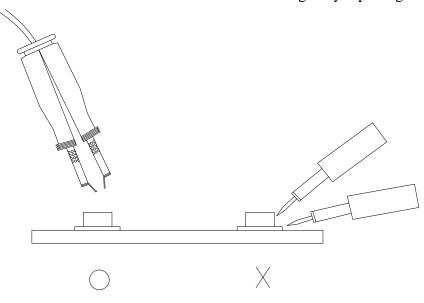


Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 1 Page: 7 of 9


Device No: DTS-193-220 Prepared date: 04-27-2006 Prepared by: Daniel Yang



Package Dimensions

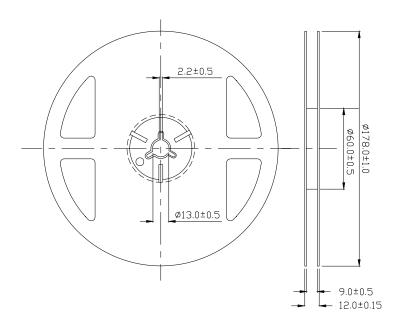

Taping Dimensions

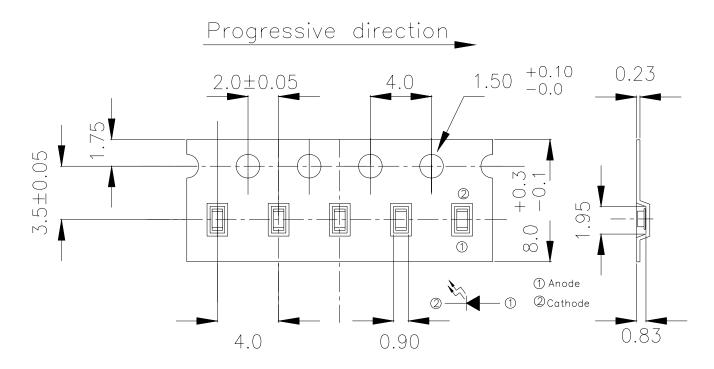

Unit: mm

Everlight Electronics Co., Ltd. Device No: DTS-193-220 http:\\www.everlight.com Prepared date: 04-27-2006 Rev 1

Page: 8 of 9

Prepared by : Daniel Yang



Packing Quantity Specification

1.3000Pcs/1Volume, 1Volume/1Bag

2.10Boxes/1Carton

Label Form Specification



CPN: Customer's Production Number

P/N: Production Number

QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936 Fax: 886-2267-6244, 2267-6189, 2267-6306

http:\\www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 9 of 9

Device No: DTS-193-220 Prepared date: 04-27-2006 Prepared by: Daniel Yang